

SPC 24SE



23.8" Stainless Steel Panel PC with Intel Celeron Processor



Features

- Ultra slim design
- Full flat P-Cap touch, with anti-scattering film
- Stainless steel SUS 304 chassis-anti bacterial
- Fanless design
- Waterproof Circular Connector
- Waterproof Antenna set
- Full system IP66 compliant
- Customized I/O ports(option)

RoHS  Windows® Embedded  

Introduction

The stainless steel Panel PC SPC 24SE series are the first product combined true flat touch screen, slim edge SUS304 with round corner enclosure, and the most important - IP66 protection for whole unit. Full IP66 SUS304 stainless Panel PC series are suitable for Food & Beverage, Packing, Slaughter house, Sanitary ware factory, Industrial Automation, Logistics, Warehousing.

Specification

Model NO.	SPC 24SE
CPU	Intel Celeron J6412 (1.5M Cache, 2.60 GHz)
System Memory	1*DDR4 SODIMM socket, max. 32GB
LCD Touch Panel	
LCD Size, Resolution	23.8" TFT, 1920 x 1080
Touch Type	PCT (Projected Capacitive touch) w/ Anti-scattering film
Connectivity	
SSD	1*128GB PCIe Gen3x4 NVMe M.2 2280 SSD, 1*PCIe Gen3x2 / SATAIII M.2 2280 expansion socket
Giga LAN (Waterproof)	2
USB 2.0 (Waterproof)	1
COM Port (Waterproof)	1
Mechanical & Environment	
Dimensions (W x D x H)	566.4 x 68 x 349.3 mm
Weight	9 kgs
Splash Resistant, Safety Certifications	IP 66 Compliant, CE/ FCC
Chassis	Stainless Steel SUS304
Storage/ Operating Temperature	-20°C~60°C/ 0°C~40°C, -10°C~50°C (Customized)
Relative Humidity	10%~90% (Non-condensing)
Power Consumption	100V~240V, 50/60 Hz
Software	
Operation System Support	Windows 10 IoT Entry, Windows 11 IoT Entry
Peripheral Options	
Wireless LAN	802.11 a/b/g/n/ac Wireless LAN
Mounting Kit	Wall Mount, Ceiling Mount, Monitor ARM


SPC 24SE

Dimensions

Unit: mm


SPC 24SE

566.4 x 68 x 349.3 (mm)- External Adapter

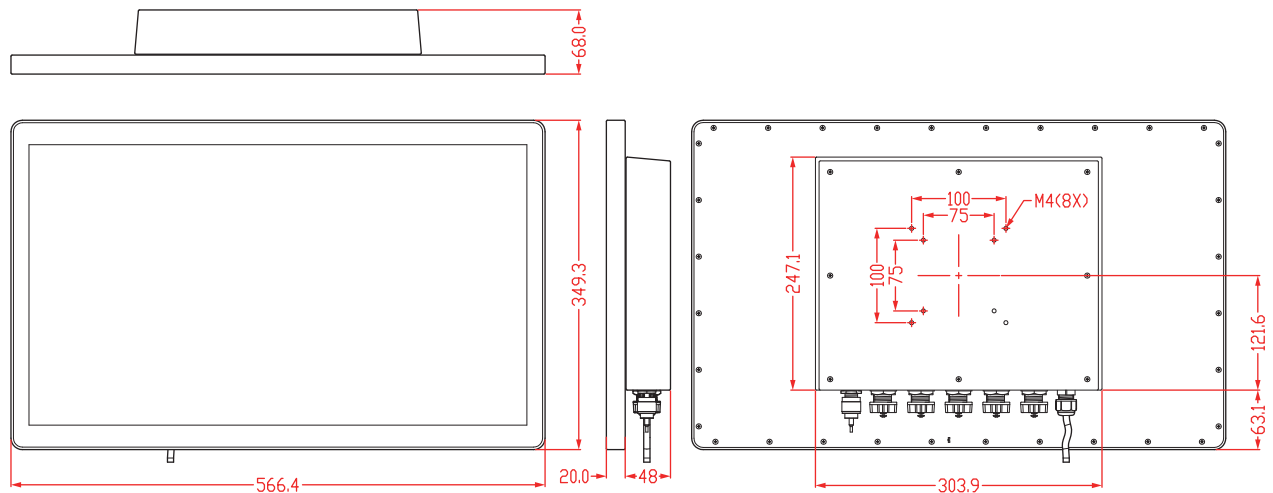

VESA

75 x 75 & 100 x 100 (mm)

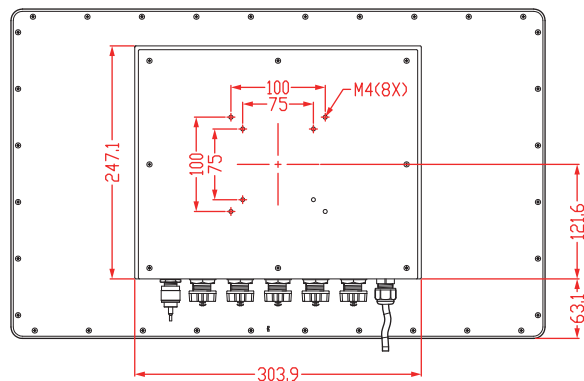

I/O Placement

WLAN:1, LAN:2 3, USB:4 5, COM:6, POWER:7

